


# GARI POWER

- Adjustable round recessed spotlight.
- Low luminance reflector.
- Fastened with springs.
- Remote dimmable converter supplied (DALI versions: converter with push-dim function).

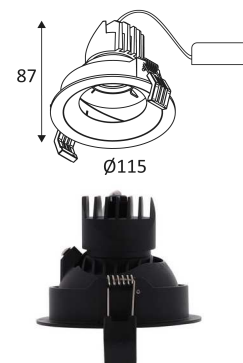

CODE	COLOR	MATERIAL	AC	DC	LED	T° (K)	LED Lumen	System Lumen	α
<b>PHASE CUT DIMMABLE</b>									
DO391SW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	878 Lm	15°
DO391SW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	878 Lm	15°
DO391WW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	972 Lm	15°
DO391WW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	972 Lm	15°
DO391NW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1042 Lm	15°
DO391NW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1042 Lm	15°
DO390SW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	897 Lm	30°
DO390SW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	897 Lm	30°
DO390WW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	944 Lm	30°
DO390WW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	944 Lm	30°
DO390NW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	970 Lm	30°
DO390NW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	970 Lm	30°
DO389SW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	816 Lm	50°
DO389SW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	816 Lm	50°
DO389WW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	913 Lm	50°
DO389WW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	913 Lm	50°
DO389NW05	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1169 Lm	50°
DO389NW30	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1169 Lm	50°
<b>DALI DIMMABLE</b>									
DO391SW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	878 Lm	15°
DO391SW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	878 Lm	15°
DO391WW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	972 Lm	15°
DO391WW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	972 Lm	15°
DO391NW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1042 Lm	15°
DO391NW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1042 Lm	15°
DO390SW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	897 Lm	30°
DO390SW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	897 Lm	30°
DO390WW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	944 Lm	30°
DO390WW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	944 Lm	30°
DO390NW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	970 Lm	30°
DO390NW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	970 Lm	30°
DO389SW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	816 Lm	50°
DO389SW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	2700K	1260 Lm	816 Lm	50°
DO389WW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	913 Lm	50°
DO389WW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	3000K	1300 Lm	913 Lm	50°
DO389NW05DA	MATT BLACK	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1169 Lm	50°
DO389NW30DA	MATT WHITE	CAST ALUMINIUM	AC 230V	DC 350mA 36V	13W	4000K	1340 Lm	1169 Lm	50°

MATT BLACK

MATT WHITE



Recessed ceiling mounting only.



Indoor use only.



Protected against the ingress of solid bodies greater than 12 mm. Protected against rain.



Protection against an impact energy of 0,20 Joule.



Product can be connected to low-voltage systems. A safety extra low voltage luminaire in which voltages higher than those of SELV are not generated.



Hole cut to insert luminaire (100mm)



The luminaire can be adjusted vertically up to a maximum of 30°.



Horizontal orientation maximum to 355°.



Product in conformity CE.



CRI>90



LED specifications.



UGR below 19.



Photobiological risk RG1



Test on 850°.



Product can not be covered after installation even with insulation.



Power supply included.



Connect to a constant current Led power supply of 350mA DC.



The product is dimmable.



5 years warranty.



Photometric data available on our website: [www.indigo-lighting.com](http://www.indigo-lighting.com)