


SLIM

This product contains 1 light source(s) of energy efficiency D.



CODE	COLOR	MATERIAL	AC	LED	T° (K)	LED Lumen	System Lumen	L (mm)
SM030R/2A/A	ANTHRACITE	CAST ALUMINIUM	AC 230V	14W	2700-3000-4000K	1820 Lm (4000K)	795 Lm (4000K)	300
SM060R/2A/A	ANTHRACITE	CAST ALUMINIUM	AC 230V	14W	2700-3000-4000K	1820 Lm (4000K)	795 Lm (4000K)	600

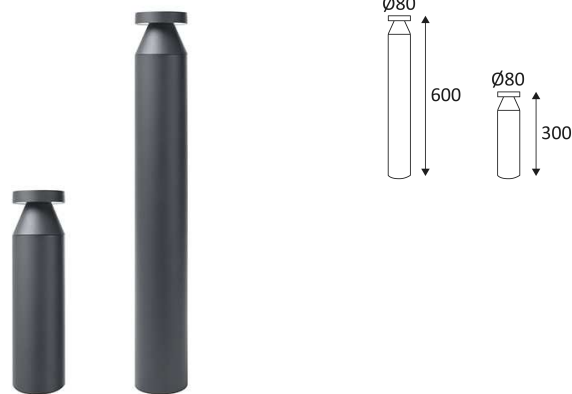

ANTHRACITE



ANTHRACITE

ACCESSOIRES	DESCRIPTION	
OU48405	CONNECTOR 2PIN IP68	
OU48505	CONNECTOR 3PIN IP68	



Floor mounting only.



Outdoor use.



Protected against the ingress of dust. Protected against jets of water.



Protection against an impact energy of 5 Joules.



Earth wire . Fixture equipped with primary insulation only.



Beam 120°.



Product in conformity CE.



Colour rendering index >80.



Selectable colour temperature.



LED specifications.



Photobiological risk RG1



Test on 650°.




Power supply included.




The product is dimmable.



5 years warranty.



Replaceable control gear by an electrician.



Replaceable LED light source by an electrician.